



S1 Duplex Steam Engine

Compatibility

This steam engine will operate on any traditional 0-72 Gauge track system, including M.T.H.'s RealTrax® or ScaleTrax™ or traditional tubular track. It is also compatible with most standard AC transformers.

(See page 24 for a complete list of compatible transformers and wiring instructions.)



Flight Wars Sound

PREMIER  M.T.H. ELECTRIC TRAINS



TABLE OF CONTENTS

| | |
|---|----|
| Set Up | 3 |
| Basic Operation | 4 |
| Transformer Controls | 4 |
| Volume Control | 4 |
| Proto-Sound 2.0 | 5 |
| Activating Proto-Sound 2.0 Conventional Mode Features | 5 |
| Freight Yard Sounds | 5 |
| Tips on Using FYS | 6 |
| Proto-Coupler® Operation | 7 |
| Speed Control | 7 |
| Lock into a Direction State | 7 |
| Reset to Factory Defaults | 8 |
| Automatic Sounds..... | 8 |
| Maintenance..... | 9 |
| Lubrication and Greasing Instructions..... | 9 |
| Cleaning the Wheels, Tires and Track..... | 10 |
| Locomotive Traction Tire Replacement | 10 |
| Smoke Unit Operation & Maintenance..... | 11 |
| Locomotive Light Bulb Replacement | 12 |
| Self-Charging Battery Back-Up..... | 13 |
| Troubleshooting | 14 |
| Compatibility..... | 16 |
| Transformer Compatibility Chart | 17 |
| Additional Features with DCS Remote Control System | 18 |
| Safety Precautions..... | 19 |
| Service and Warranty Information..... | 20 |
| Authorized Service Centers | 21 |

SET UP

There are a few simple steps you must take before operating this Premier steamer.

1. You should prime the operating smoke unit with smoke fluid before operating. Add 15-20 drops of smoke fluid through the smokestack, then gently blow into the stack to eliminate any air bubbles in the fluid.
(See Fig. 4 on page 11)
2. If you choose not to prime the unit with fluid, turn the smoke unit switch located under the tender to the OFF position. (See Fig. 5 on page 11) Running the engine without a primed smoke unit may cause damage. See the "ProtoSmoke Unit Operation" section of this book for more information on smoke unit maintenance.
3. You should lubricate all side rods and linkage components also pickup rollers to prevent them from squeaking. Use light household oil and follow the lubrication points marked "L" in Fig. 2 on page 9. Do not over oil. Use only a drop or two on each pivot point.
4. You may find, if your locomotive was built several months before you set it up, that the rechargeable battery has run down and needs to be charged before operation. If you notice that the sounds are garbled, test and charge the engine as described in the "Self Charging Battery Back-Up" section on page 13.

At this point, you are ready to begin running your engine.

BASIC OPERATION

THROTTLE

Throttle up the power to your track. Give enough power so that the engine's headlight shines brightly. Then put the engine in to motion by either firmly pressing the Direction button on your transformer or remote once or dropping and advancing to throttle to put the engine in forward.

OPERATION BUTTONS

Use the operation buttons on your transformer as described below.

Horn/Whistle - To sound the whistle, firmly press the Horn/ Whistle button. The whistle will sound for as long as you continue to depress the button. It will stop when you release the button. the whistle has four different endings, depending on whether you hold the button for less than three seconds, three seconds, four seconds, five seconds or longer.

Bell - To sound the bell, firmly press and release the Bell button. To turn the bell off, press and release the Bell button again. The bell will continue to ring from the time you turn it on until you press the release the button again to turn it off.

Direction - Your train is programmed to start in neutral. To put the engine into forward and then to change the direction of the train or to put it into neutral, firmly press and release the Direction button on your transformer. Just as you must stop your car between forward and reverse, this engine will not go directly from forward to reverse; it goes into neutral between directions. If the train has been moving forward, the first press of the Direction button will put the train from forward into neutral, the second press into reverse, the third press back into neutral, and the fourth back into forward. To prevent accidental high-speed start-ups, this engine is programmed to restart in neutral each time the track voltage is turned off or 10 seconds or more.

MANUAL VOLUME CONTROL

To adjust the volume of all sounds made by this engine, turn the master volume control knob located under the tender clockwise to increase the volume and counter-clockwise to decrease the volume. (see Figure 1)

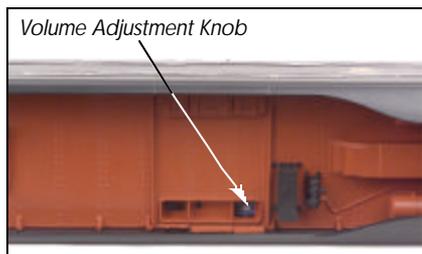


Figure 1 - Proto-Sound 2.0
Volume Adjustment Knob

S1 DUPLEX STEAM ENGINE

PREMIER  M.T.H. ELECTRIC TRAINS

4

PROTO-SOUND 2.0 OPERATION

This manual contains the operating instructions for Proto-Sound 2.0 in conventional mode only. Instructions for accessing DCS command mode features accompany the DCS Remote Control System equipment.

Because Proto-Sound 2.0 is an all-new system developed by M.T.H.'s own research and development team, it operates differently from the original Proto-Sound. Most Proto-Sound 2.0 features are automatically enabled, and the reset state has been eliminated, so there is no need to program features as with original Proto-Sound. Although the new system is easier to operate than original Proto-Sound, you should read these instructions thoroughly before using Proto-Sound 2.0 features in order to prevent harm to yourself or your equipment.

Activating Proto-Sound 2.0 Conventional Mode Features: Proto-Sound 2.0 features are activated by sequences of Bell and Whistle button pushes described below. Please read the full descriptions of each feature before using it. To use these buttons to activate features rather than to blow the whistle or ring the bell, you should press the buttons for a shorter time (*1/2 second*); you may need to practice your timing to make this work smoothly.

| Feature to be Activated | Button Code |
|--------------------------------------|---|
| Freight Yard Sounds | 1 Bell, 2 Whistles |
| Fire the Rear Coupler | 1 Bell, 3 Whistles |
| Fire the Front Coupler | 1 Bell, 4 Whistles |
| Speed Control On/Off | 1 Whistle, 2 Bells (from neutral only) |
| Lock into a Directional State/Unlock | 1 Whistle, 3 Bells |
| Reset to Factory Defaults | 1 Whistle, 5 Bells (from neutral only) |

Freight Yard Sounds (FYS): Your engine is equipped with a sound package of freight yard sounds that you can play when you pull into a yard. **Each sequence described in the following will play as long as it is left on, randomly generating sounds, but be sure to allow approximately 30 seconds between the button pushes described below to allow the FYS sufficient time to run through each sequence.**

1. To cue the sound system to play the FYS, quickly but firmly press the Bell button once followed by 2 quick presses of the Whistle button while the engine is moving.

2. Press the Direction button once to stop the engine. This will trigger the first sequence of FYS. The reverse unit is temporarily disabled so that the train will not move as you use the the Direction button to trigger the sounds, and Proto-Sound 2.0 has disabled operator control over the Whistle and Bell buttons until the full FYS sequence is complete.

3. After waiting about 30 seconds for that sequence to run, press the Direction button again to trigger the second sequence of FYS.

4. After waiting about 30 seconds, press the Direction button again to trigger the third FYS sequence.

5. Again, after allowing about 30 seconds for that sequence to run, press the Direction button one more time to trigger the fourth and final FYS sequence. The FYS will continue, and within a few seconds, the engine will start and move out on its own at the current throttle setting, in the same direction it was traveling when you began the sequence. Once the bell turns off, the operator regains control of the transformers bell and whistle buttons and can ring the bell or blow the whistle as usual.

Tips on Using FYS

■ You can terminate FYS at anytime by turning off power to the track for 15 seconds.

■ You do not have to be in Forward to use FYS. At the conclusion of the full sequence, the train will pull away from the station in whatever direction you were going when you activated the feature.

■ You can use FYS even if you are double-heading with another engine. If the second is not equipped with FYS at all, you must remember not to leave the throttle at a high voltage level once you have stopped the engine to run the FYS. Otherwise, the engine without FYS will start vibrating on the track as its motors strain to move the train, since they cannot be automatically disabled during the FYS cycle. If the second engine is an original Proto-Sound engine equipped with FYS, you may choose to disable it when used in double-heading operations, so you will not experience competing FYS sounds. To disable FYS in an original Proto-Sound engine, see the operating instructions for that engine.

FYS can be triggered from Neutral. It will operate the same as if triggered while in **Option** except that, at the conclusion of the FYS, the engine will depart in the next direction of travel, as opposed to the direction it was traveling before entering Neutral.

PROTO-COUPLER ® OPERATION

This engine is equipped with a coil-wound Proto-Couplers for remote uncoupling action. Because the Proto-Coupler is controlled through the Proto-Sound 2.0 microprocessor, it does not require an uncoupling track section or modification to your layout to function. Use the codes listed below.

Rear Coupler: To fire the rear coupler, press the Bell button once followed immediately by three pushes of the Horn/Whistle button. The sound of the lift bar and air line depletion will play, and the knuckle will be released.

Front Coupler: To fire the front coupler, press the Bell button once followed immediately by four pushes of the Horn/Whistle button. The sound of the lift bar and air line depletion will play, and the knuckle will be released.

SPEED CONTROL

M.T.H. engines equipped with Proto-Sound 2.0 have speed control capabilities that allow the engine to maintain a constant speed up and down grades and around curves, much like an automobile cruise control. You can add or drop cars on the run, and the engine will maintain the speed you set.

While the engine is programmed to start with the speed control feature activated, you can opt to turn it off. This means the engine's speed will fall as it labors up a hill and increase as it travels downward. It is also affected by the addition or release of cars while on the run. To maintain a constant speed when speed control is turned off, you need to adjust the track voltage yourself. When speed control is off, the volume will drop to allow for better low voltage operation. Full volume is restored upon reactivation of speed control.

To turn speed control on and off: First, put the engine in neutral, then press the transformer's Horn/Whistle button one time then immediately press the Bell button two times. Two whistle blasts will indicate that the engine has made the change. Repeat the 1 Horn/Whistle, 2 bells code to return it to the other state. **You will want to do this during the initial neutral start-up if you ever couple this engine with another engine that is not equipped with speed control to avoid damaging the motors in either engine.** Each time you shut down the engine completely, it will automatically turn speed control on.

LOCK INTO A DIRECTIONAL STATE

You can lock your engine into a directional state (forward, neutral, reverse) to prevent it from changing directions. To do this, put the engine into the direction you want or in neutral, run it at a very low speed (<10 scale mph), and quickly but firmly press your remote's Horn/Whistle button once followed immediately by three presses of the Bell.

S1 DUPLEX STEAM ENGINE

7 | PREMIER  M.T.H. ELECTRIC TRAINS

RESET TO FACTORY DEFAULTS

To override the settings you currently have assigned to the engine and reset it to its factory defaults, while in neutral press the Whistle button once, followed immediately by five quick pushes of the Bell button. Two whistle blasts will indicate that the engine has made the change

AUTOMATIC SOUNDS

Certain Proto-Sound 2.0 sound effects automatically play in programmed conventional mode conditions:

Squealing Brakes: This sound plays anytime the engine's speed decreases rapidly.

Cab Chatter: This sound play when the engine idles in neutral.

Engine Start-up and Shut-down: This sound plays when the engine is initially powered on or is powered off for five seconds or more.

MAINTENANCE

LUBRICATION AND GREASING

This engine should be oiled and greased in order to run properly.

You should regularly lubricate side rods and linkage components and pick-up rollers on the engine and tender to prevent them from squeaking. Use light house hold oil and follow the lubrication points marked "L" in Figure 2. Do not over oil. Use only a drop or two on each pivot.

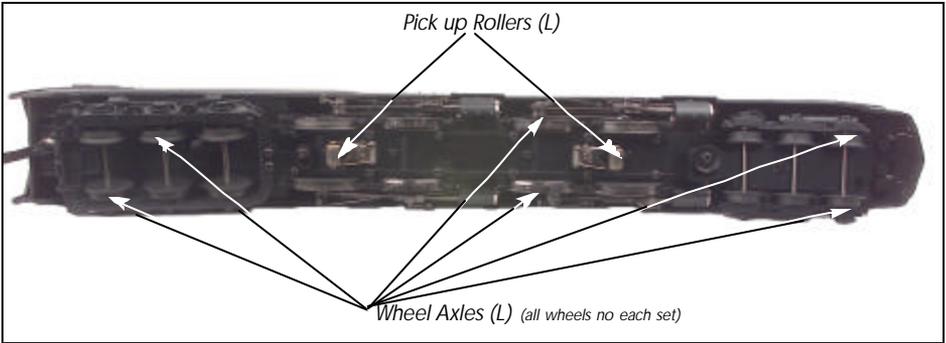


Figure 2 - Lubrication Points on the Engine

The locomotive's internal gearing was greased at the factory and should not need additional grease until after 50 hours of operation or one year, which ever comes first.

To access the gear box, do the following:

1. Unscrew the Grease screw as shown in Figure 3 and use an applicator to apply grease into these screw holes.

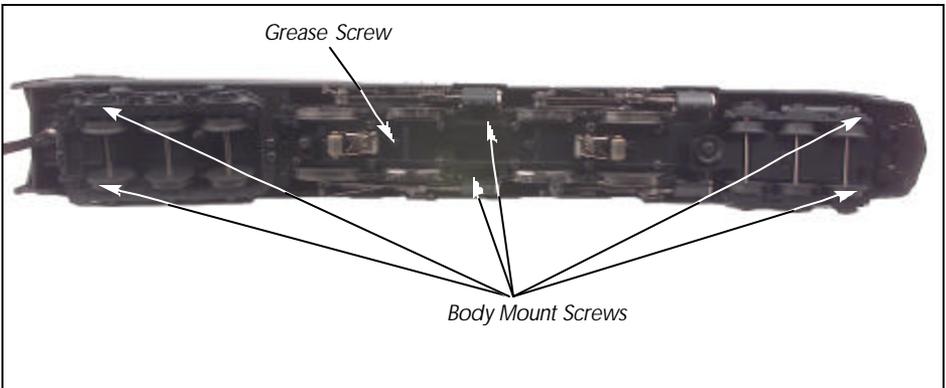


Figure 3 - Greasing points on the engine & location of body mount screws

S1 DUPLEX STEAM ENGINE

CLEANING THE WHEELS & TRACK

Periodically check the locomotive wheels and pick-up rollers for dirt and buildup, which can cause poor electrical contact and traction and prematurely wear out the neoprene traction tires. Wheels and tires can be cleaned using denatured alcohol (*not rubbing alcohol*), which can be found in home improvement stores, applied with a cotton swab.

Occasional cleaning of the track will also help to ensure good electrical contact and prolong the life of your engine's tires. To clean the track, use a clean rag and denatured alcohol (*not rubbing alcohol*). Unplug the transformer and rub the rails of the track, turning the rag frequently to ensure that you are using clean cloth on the rails.

TRACTION TIRE REPLACEMENT

Your locomotive is equipped with two neoprene rubber traction tires on the rear set of flanged drivers. While these tires are extremely durable, you may need to replace them at some point.

1. Remove the side rods from the wheels in order to slip the new tire over the grooved drive wheel. Make sure to note the position of all rods before removing.
2. Make sure the old tire has been completely removed from the groove in the drive wheel, using a razor blade or small flathead screwdriver to pry away any remains.
3. Slip the new tire onto the wheel. You may find it useful to use two small flathead screwdrivers to stretch the tire over the wheel.
4. If you twist the tire while stretching it over the wheel, you will need to remove and reinstall the tire. Otherwise your engine will wobble while operating.
5. Make sure the tire is fully seated inside the groove. Use a razor blade to trim away any excess tire that doesn't seat itself inside the groove properly.
6. Reinstall the side rods in the same positions as noted. Failure to align rods may cause binding or damage to the drive system.

One set of replacement tires is packaged with your model. Additional sets are available directly from the M.T.H. Parts Department.

phone: 410-381-2580

e-mail: parts@mth-railking.com

mail: 7020 Columbia Gateway Drive, Columbia MD 21046-1532

S1 DUPLEX STEAM ENGINE

PREMIER  M.T.H. ELECTRIC TRAINS | 10

PROTO-SMOKE® UNIT OPERATION

This locomotive contains a smoke unit that outputs smoke through the smokestack on the boiler of the engine. The smoke unit is essentially a small heating element and wick that soaks up and then heats a mineral oil-based fluid that emits a harmless smoke. The smoke is then forced out of the stack by a small electric fan. With a few easy maintenance steps, you should enjoy trouble-free smoke unit operation for years.

■ When preparing to run this engine, add 15-20 drops of smoke fluid through the smokestack. (see figure 4) We recommend M.T.H. ProtoSmoke, Seuth, LGB, or LVTS fluids (a small pipette of ProtoSmoke fluid is included). Do not over fill the unit or the fluid may leak out and coat the interior engine components.

■ If you choose not to add the fluid (or have already added the fluid but choose to run smoke free), turn off the smoke unit switch located under the tender body. (see figure 5) Failure to either add fluid to the unit or to turn it off may damage the smoke unit heating element and/or wicking material.

When the smoke output while running begins

■ diminish, add another 10-15 drops of smoke fluid or turn the smoke unit off.

When storing the unit for extended periods of

■ time, you may want to add about 15 drops of fluid to prevent the wick from drying out.

After removing the engine from storage, add

■ other 25 drops of fluid, letting the wick soak up the fluid for 15 minutes prior to operation.

If you experience poor or no smoke output when the smoke unit is on and has fluid, check the wick to see if it has become hard, blackened, and non-absorbent around the heating element. Remove 2 end bracket screws to gain access to the smoke unit.

Remove the smoke unit from the boiler. Remove the smoke unit inspection cover from the smoke unit's body. (see figure 6) After removing the chassis and inspection cover screws, lift the inspection plate away and inspect the wick. If it is darkly discolored and hard, it should be replaced. You can obtain replacement wicks and instructions from the M.T.H. Parts Department.

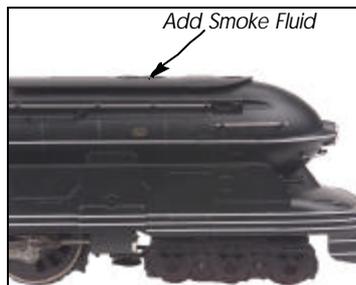


Figure 4 - Add Smoke Fluid

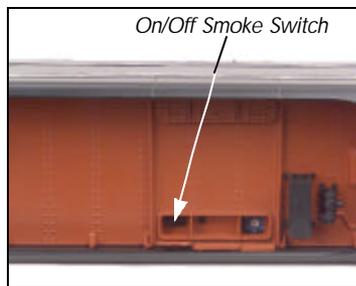


Figure 5 - Smoke Switch

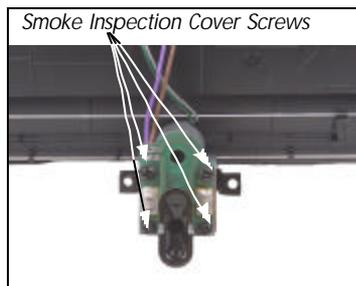


Figure 6 - Smoke Unit Inspection Cover

S1 DUPLEX STEAM ENGINE

11 PREMIER  M.T.H. ELECTRIC TRAINS

LIGHT BULB REPLACEMENT

To replace the light bulb in the locomotive, follow these instructions and see the diagrams below:

Remove the locomotive boiler from its chassis as shown in figure 3 on page 9. Once the boiler has been removed from the chassis. Carefully pull the bulb through the grommet in the back of the headlight shell. Separate the connector and connect the new bulb.

You can obtain replacement bulbs directly from the M.T.H. Parts Department.

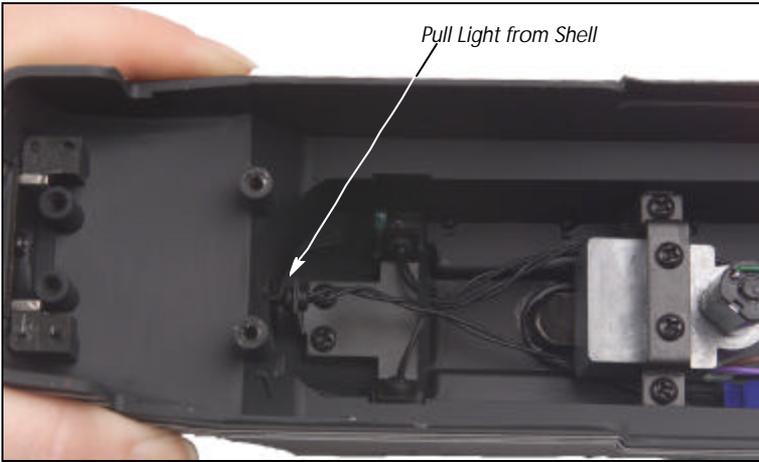


Figure 7 - Replacing the Headlight

SELF CHARGING BATTERY BACK-UP

The two special AA size 1.5v NiCad self-charging batteries recharges continuously during train operation and should last for up to five years. The batteries are dry battery that should not leak or cause any damage to your engine. Depending upon when your engine was built, they may need to be charged right out of the box. If engine sounds seem distorted or garbled at low voltages or become silent when power from the transformer is turned off, test the batteries to determine whether they should be recharged or replaced.

Test: Put the engine in neutral and leave the track voltage at 10-12 volts (high enough for the lights to shine brightly and the engine to move steadily) for 15 minutes.

Recharge: If the sounds are improved at the end of the 15-minute test charge, the batteries charge has run down and can be recharged. There are a number of ways you can do this:

- Leave the engine in neutral with track voltage at 10-12 volts for 6-7 hours so the batteries can fully recharge (if your engine has a smoke unit, be sure it is turned off).
- Use M.T.H.'s battery recharger (sold separately) that plugs into a wall outlet and a special port under the engine to recharge the batteries overnight without leaving it on the track.

Replace: If the sounds are not improved at the end of the 15-minute test charge, it is time to replace the batteries. Available through M.T.H. Parts.

DO NOT substitute alkaline batteries for these NiCad batteries. Using alkaline batteries in this system can result in damage to the PS 2.0 circuit board and/or the batteries.

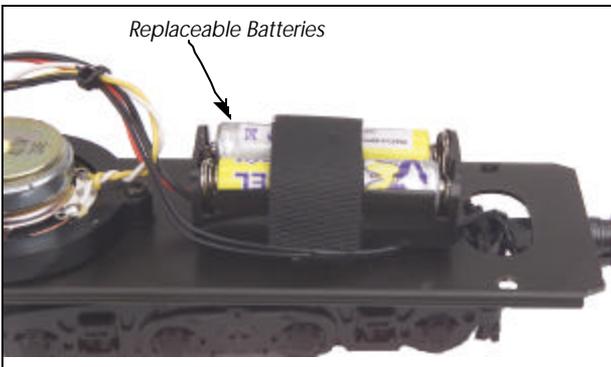


Figure 8 - Replacing the Battery

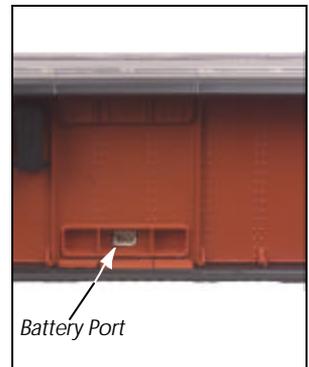


Figure 9 - Battery Port

S1 DUPLEX STEAM ENGINE

TROUBLESHOOTING PROTO-SOUND® 2.0

Although Proto-Sound 2.0 has been designed and engineered for ease of use, you may have some questions during initial operation. The following table should answer most questions. If your problem cannot be resolved with this table, contact M.T.H. for assistance (*telephone: 410-381-2580; fax: 410-423-0009; service@mth-railking.com, 7020 Columbia Gateway Drive, Columbia MD 21046-1532*).

| Starting Up | Remedy |
|---|---|
| When I first turn the power on, the engine will not begin to run. I have to turn the throttle off and on again to get the engine to operate. This is normal behavior. To prevent | accidental high-speed start-ups, ProtoSound 2.0 is programmed to start up in neutral anytime track power has been turned off for several seconds. See the "Basic Operation" section for more details. |
| Horn/Whistle | Remedy |
| When I press the horn/whistle button, the bell comes on instead. | Reverse the transformer leads. |
| I can't get the horn to blow when I press the whistle button. | You may be pressing the button too quickly. Try pressing the horn/whistle button more slowly, taking approximately one full second to fully depress the button. |
| Bell | Remedy |
| When I press the bell button, horn/whistle comes on instead. | Reverse the transformer leads. |
| I can't get the horn to blow when I press the whistle button. | You may be pressing the button too quickly. Try pressing the bell button more slowly, taking approximately one full second to fully depress the button. |
| The bell won't work on a separate bell button. | Check the wiring of the separate button. |
| Bell | Remedy |
| When I try to fire the coupler, FYS starts. | You are waiting too long between whistle button presses. |
| The Proto-Coupler won't let the engine uncouple on the fly. | Try lubricating the coupler knuckle with a dry graphite lubricant. Do NOT use oil. |
| The coupler does not fire or stay coupled. | The coupler needs to be cleaned. Wipe with denatured alcohol (<i>not rubbing alcohol</i>) and let dry. |

S1 DUPLEX STEAM ENGINE

| Cab Chatter | | Remedy |
|---|--|--|
| Sometimes the cab chatter sounds don't play. Cab chatter plays only in neutral at random | | intervals |
| Lock-out | | Remedy |
| I can't get the engine to run after I power up the transformer. It sits still with the engine sounds running. | | The engine is locked into the neutral position. Follow the directions in to the "Lock into Direction State" section. |
| The engine won't lock into forward, neutral or reverse. | | Engine speed must be below 10 scale mph. <i>(approx. 10 volts or less in conventional mode)</i> |
| Volume | | Remedy |
| The sounds seem distorted, especially when the whistle or bell is activated. | | Proto-Sound 2.0 volume is set too high. Turn the volume control knob on the bottom of the chassis counterclockwise to reduce the volume. |
| Battery | | Remedy |
| The engine will not leave the initial neutral state. | | Check to be sure the battery is installed and fully charged. See the "Self Charging Battery Back-up" section. |
| I get no sounds when the engine shifts between direction states. | | The battery may be dead or need to be charged. See the "Self Charging Battery Back-up" section. |
| After I turn off my transformer, my engine continues to make sounds before quitting. | | Proto-Sound 2.0 is designed to continue to sound for a few seconds after the power to the track has been shut off. |
| FYS | | Remedy |
| The FYS sounds occasionally repeat themselves. | | Proto-Sound 2.0 has a built in random number generator that randomly selects each sound clip to play. Because there are a limited number of sound clips available in each FYS sequence, it is probable that some of these sound clips will be repeated from time to time. So that FYS effects can be as realistic as possible, Proto-Sound 2.0 disables the reversing unit whenever it is enabled. This way the engine remains still at its stop as the operator cycles through the FYS sequences. It is programmed to start ringing the bell at that point. After approximately 12 rings of the |
| Once in FYS, the engine doesn't go into reverse. | | bell, it will automatically turn off. |
| When the FYS enters its last sequence the bell automatically comes on. | | |

S1 DUPLEX STEAM ENGINE

| FYS (continued) | Remedy |
|--|---|
| When FYS is enabled, pressing the whistle and bell automatically comes on. | Because FYS must control various effects in each sequence, Proto-Sound 2.0 takes control of these sound effects until you exit FYS. |
| I push the direction button but the next sound clip in the sequence does not play or the engine does not come out of FYS after fourth press of direction button. | Each FYS clip must play for approximately 30 seconds before FYS will advance to the next step in the FYS cycle. Wait at least 30 seconds in each FYS sound clip before pressing the sound button. |

COMPATIBILITY

This engine will operate on any traditional O-72 or larger O Gauge track system, including M.T.H.'s RealTrax® or ScaleTrax™ or traditional tubular track. It is also compatible with most standard AC transformers. *(See page 17 for a complete list of compatible transformers and wiring instructions.)*

TRANSFORMER COMPATIBILITY CHART

Note that many of the operational commands described in these instructions require a bell button, so if your transformer does not have its own bell button, you should consider adding one to get the full benefit of the system.

| Transformer Rail | Center Rail | Outside Rail | Min/Max Voltage | Power Rating | Transformer Type |
|--|------------------------|-----------------------|-----------------|--------------|------------------|
| MTH Z-500 | Red Terminal | Black Terminal | 0-18v | 50 watt | Electronic |
| MTH Z-750 | Red Terminal | Black Terminal | 0-21v | 75 watt | Electronic |
| MTH Z-1000 | Red Terminal | Black Terminal | 0-21v | 100 Watt | Electronic |
| MTH Z-4000 | Red Terminal | Black Terminal | 0-22v | 390 watt | Electronic |
| Lionel 1032 | U | A | 5-16v | 90 watt | Standard |
| Lionel 1032M | U | A | 5-16v | 90 watt | Standard |
| Lionel 1033 | U | A | 5-16v | 90 watt | Standard |
| Lionel 1043 | U | A | 5-16v | 90 watt | Standard |
| Lionel 1043M | U | A | 5-16v | 90 watt | Standard |
| Lionel 1044 | U | A | 5-16v | 90 watt | Standard |
| Lionel 1053 | U | A | 5-16v | 90 watt | Standard |
| Lionel 1063 | U | A | 5-16v | 90 watt | Standard |
| All-Trol | Left Terminal | Right Terminal | 0-24v | 300 watt | Electronic |
| Powermaster* | A | U | 0-18v | 135V.A. | Electronic |
| Dallee Hostler | Left Terminal | Right Terminal | | | Electronic |
| Lionel MW | Outside Track Terminal | Inside Track Terminal | 5-16v | 50V.A. | Electronic |
| R.O.W. | Red Terminal | Black Terminal | 0-24v | 384 watt | Standard |
| Lionel RS-1 | Red Terminal | Black Terminal | 0-18v | 50V.A. | Electronic |
| Lionel RW | U | A | 9-19v | 110 watt | Standard |
| Lionel SW | U | A | Unknown | 130 watt | Standard |
| Lionel TW | U | A | 8-18v | 175 watt | Standard |
| Lionel ZW | A,B,C or D | U | 8-20v | 275 watt | Standard |
| Lionel Post War Celebration Series ZW* | A,B,C or D | Common | 0-20v | 135/190 watt | Electronic |

* Conventional Mode Only

SHAY STEAM ENGINE

17 RAILKING  M.T.H. ELECTRIC TRAINS

ADDITIONAL FEATURES

ACCESSIBLE WITH DCS REMOTE CONTROL SYSTEM

While conventional mode operation of a Proto-Sound 2.0 engine yields wonderfully realistic sound and several train control features, command mode operation allows the user to access a world of command functions never before accessible to O Gauge railroaders. With the addition of the DCS Remote Control System (*including a DCS remote hand held and Track Interface Unit*) users gain many advanced features, including:

DCS Proto-Speed Control - Establishes desired locomotive speed in scale miles per hour increments via a thumbwheel control and allows operator to set maximum speed and acceleration/deceleration rates.

Locomotive Lighting Control - Independently controls locomotive headlights, marker and interior lights, and ditch lights.

Emergency Stop - Single button push stops your trains (*but does not turn off track power*).

One Touch Global Mute/UnMute - Single button mutes or unmutes all DCS controlled locomotives' user-defined actions, including sound, lights, and smoke.

Proto-Dispatch Operation - Public Address-like feature allows users to speak through locomotive speaker during operation.

Proto-Cast - Allows users to play audio recordings through locomotive speaker during operation.

Proto-Doppler Sound Effects Set Up - Users can configure locomotive for Doppler Operation, including setting distance points for Doppler start, repeat, and stop modes.

Independent Volume Control of Engine Sounds, Bell, Horn & Whistle for each locomotive.

Control up to 50 different DCS-equipped locomotives at one time with multiple TIUs.

Proto-Effects™ Set Up - User can select individual Proto-Effects™ operations to be active or inactive, including cab chatter, train wreck sounds, coupler sounds, and wheel clickety-clack sounds.

Direction Control Set Up - User can set initial individual start-up direction (*start forward or reverse*) for double-heading operations.

Locomotive Consist Set-up - User can determine locomotive values for consist make-ups, allowing multiple locomotives belonging to a consist to operate together.

Query Locomotive Information - User can query locomotive programming to learn locomotive address and engine data information, including scale miles traveled.

S1 DUPLEX STEAM ENGINE

PREMIER  M.T.H. ELECTRIC TRAINS | 18

■ User Can Query, Set and Operate Track and Accessory Interface Units for Programming Digital Command Operations for up to 250 Accessories and 250 Individual Switches.

■ User Can Script, Record and Playback Train Routes.

CAUTION:

ELECTRICALLY OPERATED PRODUCT:

Not recommended for children under 10 years of age. M.T.H. recommends adult supervision with children ages 10 - 16. As with all electric products, precautions should be observed during handling and use to reduce the risk of electric shock.

WARNING: When using electrical products, basic safety precautions should be followed including the following:

■ Read this manual thoroughly before using this device.

■ M.T.H. recommends that all users and persons supervising use examine the hobby transformer periodically for conditions that may result in the risk of fire, electric shock, or injury to persons, such as damage to the primary cord, plug blades, housing, output jacks or other parts. In the event such conditions exist, the transformer should not be used until properly repaired.

■ As with all electrical appliances, this product should not be left in operation when unattended.

SERVICE & WARRANTY INFORMATION

How to Get Service Under the Terms of the Limited One-Year Warranty

When you suspect an item is defective, please check the operator's manual for standard operation and trouble-shooting techniques that may correct the problem. Additional information may be found on the M.T.H. Website. Should you still require service, follow the instructions below to obtain warranty service.

First, e-mail, write, call or fax a M.T.H. Authorized Service Center (ASC) in your area to obtain Repair Authorization. You can find the list of ASCs on the M.T.H. Website, www.mth-railking.com. Authorized Service Centers are required to make warranty repairs on items sold only from that store; all other repairs may-- or may not be done at the store's own discretion. If you did not purchase the item directly from the ASC, you will need to select a National Authorized Service Center (NASC). These centers are compensated by M.T.H. to perform warranty service for any customer whose repair qualifies for warranty service. A list of NASC retailers can be located on the M.T.H. Website or by calling 1-888-640-3700. Should the warranty no longer apply, you may choose either an ASC or NASC retailer to service your M.T.H. Product. A reasonable service fee will be charged.

CAUTION: Make sure the product is packed in its original factory packaging including its foam and plastic wrapping material to prevent damage to the merchandise. There is no need to return the entire set if only one of the components is in need of repair unless otherwise instructed by the Service Center. The shipment must be prepaid and we recommend that it be insured. A cover letter including your name, address, daytime phone number, e-mail address (*if available*), Return Authorization number (*if required by the service center*), a copy of your sales receipt and a full description of the problem must be included to facilitate the repairs. Please include the description regardless of whether you discussed the problem with a service technician when contacting the Service Center for your Return Authorization.

Please make sure you have followed the instructions carefully before returning any merchandise for service. Authorized M.T.H. Service Centers are independently owned and operated and are not agents or representatives of M.T.H. Electric Trains. M.T.H. assumes no responsibility, financial or otherwise, for material left in their possession, or work done, by privately owned M.T.H. Authorized Service Centers.

If you need assistance at any time email MTH Service at service@mth-railking.com, or call 410 381-2580.

LIMITED ONE-YEAR WARRANTY

All M.T.H. products purchased from an Authorized M.T.H. Train Merchant are covered by this warranty.

See our website at www.mth-railking.com or call 1-888-640-3700 to identify an Authorized M.T.H. Train Merchant near you.

M.T.H. products are warranted for one year from the date of purchase against defects in material or workmanship, excluding wear items such as light bulbs, pick-up rollers, batteries, smoke unit wicks, and traction tires. We will repair or replace (*at our option*) the defective part without charge for the parts or labor, if the item is returned to an M.T.H. Authorized Service Center (ASC) or M.T.H. National Authorized Service Center (NASC) within one year of the original date of purchase. This warranty does not cover damages caused by improper care, handling, or use. Transportation costs incurred by the customer are not covered under this warranty.

Items sent for repair must be accompanied by a return authorization number, a description of the problem, and a copy of the original sales receipt from an Authorized M.T.H. Train Merchant, which gives the date of purchase. If you are sending this product to an Authorized Service Center, contact that Center for their return authorization.

This warranty gives you specific legal rights, and you may have other rights that vary from state to state. Specific questions regarding the warranty may be forwarded to M.T.H. directly.

**Service Department • M.T.H. Electric Trains
7020 Columbia Gateway Drive • Columbia MD 21046-1532**

S1 DUPLEX STEAM ENGINE

PREMIER  M.T.H. ELECTRIC TRAINS | 20



PARTICIPATING N.A.S.C. RETAILER LIST

CANADA

Toy Train Workshop
Cumberland
613-833-9331

The Train Room
Fergus
519-787-3280

CALIFORNIA

Tin Plate Junction
Oakland
510-444-4780

COLORADO

Mizell Trains Inc.
Westminster
303-429-4811

CONNECTICUT

New England Hobby Supply
Manchester
860-646-0610

FLORIDA

Roundhouse South
Port Orange
386-304-7002

MARYLAND

Plaza Hobby
Cumberland
301-729-6424

Engine House Hobbies
Gaithersburg
301-590-0816

Catoctin Mountain Trains
& Hobbies
Thurmont
301-694-8331

MICHIGAN

Michigan Model Train Center
Pinckney
734-426-1651

Brasseur Electric Trains Inc.

Saginaw
989-793-4753

NEW HAMPSHIRE

Treasured Toys
Salem
603-898-7224

NEW YORK

Aurora Rails & Hobbies
East Aurora
716-652-5718

OHIO

Davis Electronics
Milford
513-831-6425

Rick's Toy Trains
Toledo
419-478-0171

PENNSYLVANIA

Bussinger Trains
Ambler
215-628-2366

Fairchance Pharmacy
Fairchance
724-564-7817

Toby Tyler
Pittsburgh
412-653-5030

VIRGINIA

Locust Grove Trains
Locust Grove
540-854-8955

Davis Hobby Supplies
Portsmouth
757-397-1983

TSG Hobbies
Warrenton
540-347-9212

WISCONSIN

Sommerfeld's Trains
Butler
262-783-7797

Grampa's Train Shop
Rice Lake
715-234-2996

S1 DUPLEX STEAM ENGINE

21 PREMIER  M.T.H. ELECTRIC TRAINS



PARTICIPATING A.S.C. RETAILER LIST

CANADA

Toy Train Workshop
Cumberland
613-833-9331

The Train Room
Fergus
519-787-3280

Credit Valley Railway Company
Streetsville
905-826-1306

BH Trains
Terrebonne
450-492-0317

ALABAMA

Southerland Station
Huntsville
256-533-4720

Lil' Bobby's Hobbies
Montgomery
334-277-1715

ARIZONA

Arizona Train Depot
Mesa
480-833-9486

CALIFORNIA

Central Coast Trains
Atascadero

805-466-1391

Train Shack
Burbank
818-842-3330

Roundhouse
North Hollywood
818-769-0403

Dollhouses, Trains & More
Novato
415-883-0388

Tin Plate Junction
Oakland
510-444-4780

Ron's World
San Clemente
949-361-5596

Trucks & Trains Hobbies
Santa Rosa
707-537-6586

COLORADO

Custom Railway Supply
Colorado Springs
719-634-4616

Mizell Trains Inc.
Westminster
303-429-4811

CONNECTICUT

New England Hobby Supply
Manchester
860-646-0610

FLORIDA

Hollywood Station
Hollywood
954-921-2700

Depot Hobby Shop
Lake Worth
561-585-1982

Ready To Roll
Miami
305-688-8868

Frank's Trains & Hobbies Inc.
Oldsmar
813-855-1041

Colonial Photo & Hobby
Orlando
407-841-1485

Warrick Custom Hobbies
Plantation
954-370-0808

Roundhouse South
Port Orange
386-304-7002

ILLINOIS

Bike & Choo Choo Connection
Schaumburg
847-882-7728

INDIANA

Y.O.R.K. Trains
Munster
219-838-9999

Samuelson's Train Shop
Valparaiso
219-462-2708

IOWA

Caboose Stop Hobbies
Cedar Falls
800-642-7012

S1 DUPLEX STEAM ENGINE

PREMIER  M.T.H. ELECTRIC TRAINS | 22

KENTUCKY

L&N Trains & Things
Louisville
502-897-9005

LOUISIANA

America's Train Yard
Baton Rouge
225-926-5592

MAINE

Wheels, Wing & Things
Ludlow
207-532-6277

MARYLAND

Plaza Hobby
Cumberland
301-729-6424
Hobbytown USA
Frederick
301-694-7395

Engine House Hobbies
Gaithersburg
301-590-0816

J&B Trains
Hagerstown
240-420-4930

The Train Room
Hagerstown
301-745-6681

Purkey's Toy Trains
Sykesville
410-549-6061

Catoctin Mountain Trains
& Hobbies
Thurmont
301-694-8331

MASSACHUSETTS

Northeast Trains
Peabody
978-532-1615

East Bay Hobbies
Seekonk
508-336-5573

MICHIGAN

Michigan Model Train Center
Pinckney
734-426-1651

Brasseur Electric Trains
Saginaw
989-793-4753

MISSOURI

Switch Stand
Saint Louis
314-781-4458

Mark Twain Hobby Center
St. Charles
636-946-2816

NEVADA

Reno Rails
Reno
775-337-6669

NEW HAMPSHIRE

Railroad Specialties
Nashua
603-801-0801

Treasured Toys
Salem
603-898-7224

NEW JERSEY

Country and Stuff
Andover
973-786-7086

Columbus Train Station
Columbus
609-518-1800

Atlantic Rails
Hammonton
609-567-8490

Grand Central Station
Kearny
201-955-6200

J&B Trains
Maple Shade
856-414-0092

Hobby Shop
Matawan
732-583-0505

Hobbymasters, Inc.
Red Bank
732-842-6020

Ridgefield Hobby
Ridgefield
201-943-2636

Tom's Model Trains
Scotch Plains
908-322-6122

Trains & Things
Trenton
609-883-8790

Coast Trains and Collectibles
Wall
732-556-9005

Holly Beach Train Depot
Wildwood
609-522-2379

NEW YORK

Aurora Rails & Hobbies
East Aurora
716-652-5718

Nassau Hobby Center, Inc.
Freeport
516-378-9594

Hobby World
Monticello
845-794-8770

City Depot, Inc.
New Hampton
845-374-3010

Americana Store
Tivoli
845-757-4246

Kross Hardware
West Babylon
631-669-3069

NORTH CAROLINA

The Roundhouse & Backshop
Cary
919-465-0810

Trains LTD.
Charlotte
704-566-9070

Day Bridge Station
Mount Airy
336-786-9811

The Freight Yard
Smithfield
919-934-6229

Train Loft
Winston-Salem
336-760-9817

OHIO

Glen's Train Shop
Akron
330-253-6527

E&S Trains
Akron
330-745-0785

S1 DUPLEX STEAM ENGINE

23 PREMIER  M.T.H. ELECTRIC TRAINS

T&K Hobby Shop
Bridgeport
740-633-6607

Parma Hobby
Cleveland
216-741-6440

Sandy's Hobbies &
Collectibles
Elyria
440-365-9999

Hudson Toy, Train & Hobby
Hudson
330-653-2997

Clearview Train & Hobby
Lorain
440-277-4488

Dixie Union Station
Mason
513-459-0460

Davis Electronics
Milford
513-831-6425

Trains-n-Things
North Canton
330-499-1666

Grand Pacific Junction
Olmstead Falls
440-235-4777

Rick's Toy Trains
Toledo
419-478-0171

Erie Railway Depot
Troy
937-440-9972

PENNSYLVANIA
American Hobby Center
Aliquippa
724-378-3930

Allentown Toy Train Service
Allentown
610-821-0740

On The Right Track
Altoona
814-942-4345

Bussinger Trains
Ambler
215-628-2366

Ye Old Train & Christmas
Shoppe
Boyetown
610-369-0755

Charleroi Sweeper Center
Charleroi
724-483-3397

Cranberry Hobby Depot
Cranberry Township
724-776-3640

Fairchance Pharmacy
Fairchance
724-564-7817

Toy Train Station
Feasterville Trev
215-322-5182

The Caboose
Lehighton
570-386-5352

Hobby City
McMurray
724-942-2557

The Station
New Cumberland
717-774-7096

Fryer's Store
Orwigsburg
570-366-2258

Chestnut Toybox
Philadelphia
215-545-0455

Toby Tyler
Pittsburgh
412-653-5030

Wilcox Greenhouse & Nursery
Titusville
814-827-3823

SOUTH CAROLINA
Emerald Train & Hobby
Greenwood
864-223-2247

TENNESSEE
Model Railroad & Hobby Shop
Memphis
901-384-6500

TEXAS
Hobby Time
Amarillo
806-352-9660

Riverview Trains
Angleton
979-848-3895

Great Trains & Hobbies
Longview
903-757-2720

VIRGINIA
Locust Grove Trains
Locust Grove
540-854-8955

Train Depot
Manassas
703-335-2216

Chesterfield Hobbies
Midlothian
804-379-9091

Davis Hobby Supplies
Portsmouth
757-397-1983

Toy Train Center
Richmond
804-288-4475

Nutbush Express
Victoria
434-696-1902

TSG Hobbies
Warrenton
540-347-9212

Norge Station
Williamsburg
757-564-7623

WEST VIRGINIA
Patrick's Trains
Wheeling
304-232-0714

WISCONSIN
Woodcrafters Shop
Burlington
262-763-5239

Sommerfeld's Trains
Bulter
262-783-7797

Hobby Outlet
Fond Du Lac
920-924-3770

GB TV & Tains
Greenbay
920-496-9697

Grampa's Train Shop
Rice Lake
715-234-2996

The Train Store
Waukesha
262-650-6675

S1 DUPLEX STEAM ENGINE

PREMIER  M.T.H. ELECTRIC TRAINS | 24