

RAILKING GALLOPING GOOSE™ OPERATING INSTRUCTIONS



Thank you for purchasing the RailKing Galloping Goose™. The car's durable ABS body and die-cast trucks are built to ¼ inch scale proportions yet can provide hours of operation on any O-27 Gauge track. The car should operate for years with any compatible AC transformer (see the chart on page 28 for a list of compatible transformers) and is completely compatible with most 3-rail locomotives, rolling stock and accessories.

The Galloping Goose™ is equipped with a DCRU® electronic reverse unit and can be optionally equipped with the ProtoSound® Digital Sound and train control system which contains several deluxe features that are simple and fun to operate. Each feature is described among the following pages which should be read before the car is operated. For those of you who can't wait to get started, the *Quick Start Basic Operating Instructions* found on Pages 3 and 4 should be read so that you understand the basics of the operating system. Please note that some features are only found in the ProtoSound® models and are marked as such. Features not marked as ProtoSound® features are available in all models.

RAILKING

Table Of Contents

QUICK START - BASIC OPERATION	3
PROTOSOUNDS™ OPERATING INSTRUCTIONS	4
ProtoSound® DCRU® Reverse Unit Operation(All 3-Rail Models)	4
Horn Operation	5
Bell Operation	5
Squeaking Brake Sounds	6
Tips On Using Squeaking Brakes	7
Self-Recharging Battery Backup System	8
Branch Line Sounds (SAS)	9
Activating Branch Line Sounds	9
Tips On Using Branch Line Sounds	12
ProtoSound® Volume Adjustment	13
USING “RESET” TO PROGRAM PROTOSOUNDS™	13
Entering RESET Options	13
Setting The Engine Volume	14
Programming For A Separate Bell Button Controller	15
Programming For Squeaking Brake Operation	16
Programming For Horn In Neutral Operation	17
Programming For SAS Operation	17
Activating Reverse Unit Lock-Out Control	17
Resetting All ProtoSound® Options To Factory Defaults	18
Reverse Unit Lockout Control Functions	19
Locking The Engine Into Forward or Reverse	19
Unlocking The Engine	19
Locking The Engine Into Neutral	19
Manual Reverse Unit Lockout	20
OIL & LUBRICATION INSTRUCTIONS	21
TRACTION TIRE REPLACEMENT INSTRUCTIONS	22
LIGHT BULB REMOVAL & REPLACEMENT	23
TROUBLE SHOOTING <i>PROTOSOUND</i>™ PROBLEMS	24
Transformer Wiring Chart	28
ProtoSound® RESET Feature Chart	29
SERVICE AND WARRANTY INFORMATION	30
HOW TO GET SERVICE	30
LIMITED ONE YEAR WARRANTY	30

QUICK START - BASIC OPERATION

The RailKing Galloping Goose™ contains state-of-the-art electronics with several built-in automatic features for incredibly realistic operation. Despite these advanced features, the Galloping Goose™ is easy to operate with any compatible standard AC transformer (see the compatibility chart on page 28).

All models are controlled by a ProtoSound® DCRU® electronic reverse unit. The reverse unit operates in the same manner that all reverse units function by using forward, neutral and reverse states that are entered each time the throttle is turned on and off or by using the transformer direction switch (if so equipped).

The reverse unit is designed to ignore dirty track, dead spots on switches or minor short circuits without disrupting the engine operation, even at slow, prototypical speeds. Once the engine is placed on the track, the throttle on the transformer can be advanced. You will see that only the Galloping Goose™'s lights come on and that only two dings of the ProtoSound bell occur (on ProtoSound equipped 3-rail models). The Galloping Goose™ does not run. This is known as the RESET state and is explained in more detail beginning on Page 4. The ProtoSound® DCRU® will not


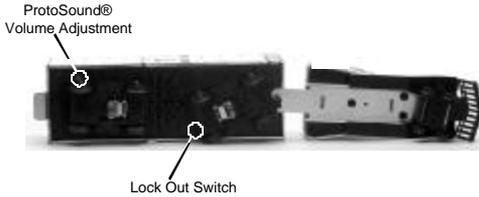


Figure 1: Locating The Galloping Galloping Goose™'s switches



power the motor until the throttle is turned OFF and then ON again. At this point, the Galloping Goose™ will now function just like any other engine equipped with an electronic or mechanical E-unit. On the ProtoSound-equipped Galloping Goose™, the motor sounds will change slightly in volume as the Galloping Goose™ begins to move. The horn can be activated by pressing the whistle button on the transformer just as any horn would be activated. See the sections later in this guide, beginning on page 5, for more information on activating the horn and bell sounds.

PROTOSOUNDS® OPERATING INSTRUCTIONS

The MTH ProtoSound® digital sound and train control system provides the operator with unprecedented realistic operation on your model railroad. In addition to actual Galloping Goose™ CD-equivalent 16-bit digital sounds, you get the following features:

- * **Built-In DCRU Reverse Unit** * **Authentic Horn Sound** * **Authentic Galloping Goose™ Bell Sound** * **Squeaking Brake Sound** * **Special Announcement Sounds**
- * **Self-Recharging Battery Back-Up System With Automatic Battery Shut-Off** *
- Remotely Controlled Reverse Unit Lock-Out** * **Remotely Adjustable Engine Volume** *

Each feature is described among the following pages. Though the system is easy to use, we encourage you to read the instructions thoroughly.

PROTOSOUND® DCRU® REVERSE UNIT

As mentioned in the Basic Operating section, the car is controlled by a ProtoSound® DCRU® reverse unit that contains the standard forward-neutral-reverse states found on most reverse units. However, as described earlier, when power is first applied to the track, the reverse unit begins in RESET or what seems like a neutral state. Power must be interrupted again to get the car to enter the forward state. It is this first RESET state that gives ProtoSound® its unique, remote controlled functions. The system will enter RESET whenever power to the track is off for three or more seconds. NEUTRAL will be referred to as the state between Forward and Reverse.

ProtoSounds® is equipped with a microprocessor, that allows the user to utilize several remotely activated functions. In the simplest terms, ProtoSounds® has its own "Computer" controlling these functions. In fact, the power of this microprocessor is the same as that of a 286 desktop computer! In order to access many of these remotely controlled functions, the user must be in the RESET state to do so. RESET is entered anytime power to the locomotive has been off for more than 3 to 5 seconds. When the Galloping Goose™ first enters RESET, the microprocessor initiates a system check to determine if the system, transformer and Galloping Goose™ are operating correctly. This takes approximately 2.2 seconds. In order for ProtoSounds® to properly initiate the system check, do not advance the transformer throttle past 10 volts when you first enter RESET,

then slowly turn the transformer throttle to the off position and then back on again to enter the forward phase. Interrupting the power too quickly may cause the system to re-enter RESET (signaled by two dings of the bell). Should this happen, wait longer before interrupting the power to enter the Forward phase.

ProtoSounds® comes with several programmable functions, including Engine Volume Adjustment, Separate Bell Button Operation (pre-programmed at the factory), and Horn-In-Neutral Operation. Each of these features are described in more detail later. You will notice that when in RESET, your Galloping Goose™ will not respond to the whistle button with a horn blast or continuous bell ringing. In fact, when in RESET and the whistle button is depressed, only one single bell chime will be heard each time the whistle button is pressed. If you don't want to configure or change your Galloping Goose™ using any of these programmable features, simply leave RESET after waiting 2.2 seconds by interrupting the power to put the Galloping Goose™ in forward. After you leave RESET, your Galloping Goose™ will operate normally in all the direction states of forward, neutral and reverse.

HORN OPERATION

Your RailKing ProtoSound® equipped Galloping Goose™ features a digital recording of a Galloping Goose™ horn. The horn sound can be activated anytime the Galloping Goose™ is in forward or reverse by pressing the whistle button on your transformer. The horn will continue to blow as long as the whistle button is depressed. The horn will not function in RESET and must be configured through a RESET option to allow the horn to work when the car is in neutral. See page 16 for information on horn programming in the *Using RESET To Program ProtoSounds®* section of this manual.

BELL OPERATION

Your RailKing ProtoSound® equipped Galloping Goose™ features a digital recording of an actual Galloping Goose™. The bell can be turned on or off with any separate bell button, like the Lionel® Railsounds® No. 5906 Bell Button, by simply pushing the button. If you don't have a separate bell button, the bell can be controlled through your transformer's whistle button whenever the car is in NEUTRAL. The bell will never ring continuously in RESET (Remember NEUTRAL is the state between Forward and Reverse). Once the bell is turned on, it will continue to ring

when the Galloping Goose™ is cycled into forward or reverse until you press and release the bell button or re-enter NEUTRAL and turn the bell off with the whistle button.

In fact, because of ProtoSounds® state-of-the-art design, the microprocessor remembers its last command. Therefore, unless you turn the bell off before you quit running your Galloping Goose™, the next time you run the Galloping Goose™, the bell will come on. No matter whether you come back an hour later or a year later, the bell will begin chiming once the car enters one of the three directional states.

Unlike most ProtoSound® equipped engines, the Galloping Goose™ version of the ProtoSound® software activates the bell in a slightly different manner. Normally, the bell is activated by pressing the bell button. With the Galloping Goose's™ unique Special Announcements Sounds feature, the bell button is used to activate the Special Announcements as well as to control the bell. The ProtoSound® equipped Galloping Goose™ bell can be controlled by a bell button. To start the bell sound, the operator must push and release the bell button quickly. Failure to release the button quickly will activate the Special Announcements Sounds feature which is described on the following pages.

To turn the bell on using the transformer's whistle button, turn on power to the track and cycle the engine into NEUTRAL. Turn the throttle to 8 volts or less and press the whistle button. The bell should begin chiming. To turn the bell off, press the whistle button again. If you want to keep the bell on while running the Galloping Goose™, simply interrupt the power with the transformer throttle or the transformer directional switch and enter forward or reverse.

SQUEAKING BRAKE SOUNDS


ProtoSound® equipped engines feature the ability to play the sound of squeaking brakes whenever your Galloping Goose™ slows in speed. The Galloping Goose™ is shipped with a default setting that causes the brake sounds to play while the Galloping Goose™ is in forward or reverse and the transformer throttle is lowered from a high setting to a low setting (14 volts to 8 volts or less). The brakes can be turned off through a RESET setting explained later in this manual. The sound itself is a stored record on the ProtoSounds software chip and will always play the same brake sound for the same three second length each time the voltage is reduced from high to low. Some practice may be required to synchronize the playing of the brake sounds with the movement of the Galloping Goose™. It is not uncommon

for the Galloping Goose™ to stop before the brake sound is completed. Operators will find that by coordinating the movement of the throttle setting from 8 volts to off will allow the Galloping Goose™ to maintain its movement while the brake sounds play. *Note: The brake sounds will not be heard if the transformer throttle is not set above 14 volts and/or not reduced below 8 volts.*

Throttle Down From High Voltage To Low



Listen For The Squeaking Brake Sounds



TIPS ON USING THE SQUEAKING BRAKE FEATURE

Because the squeaking brake feature always plays for approximately 3 seconds, it is possible that the brake sounds will play longer or shorter than what visually seems prototypical. You will find that by practicing with the brake feature, you can determine how quickly to throttle down and what speeds and voltage settings give you the most prototypical braking effect.

Typical users will find the feature to be a very realistic way to simulate the sound of a Galloping Goose™ slowing down for curves, crossings or coming to a stop at a station, side track or switch yard. As mentioned above, you will find that initially your Galloping Goose™ may continue to play the brake sounds once it comes to a stop or that the sounds stop prematurely before the Galloping Goose™ comes to a complete halt. For example, if you simply run the Galloping Goose™ and turn the throttle off quickly, the brake sounds will likely continue playing even though the Galloping Goose™ has come to a complete stop. This annoying effect can be eliminated by simply practicing with the brake feature. In no time, you will quickly learn how to “feather” the throttle to keep the Galloping Goose™ moving while the brake sounds play and then turning the throttle off just as the sounds stop.

The ProtoSound® squeaking brake feature also has the ability to simulate the squeal of wheel flanges when your Galloping Goose™ enters a curve at high speeds. The same brake squeaking sound plays, but you don’t need to reduce the transformer throttle to activate the squeaking sounds. To play the squeaking sounds as wheel flange sounds, you can trigger the brake feature with the whistle button on the transformer. As your engine enters a curve (or anywhere on the layout) quickly “flick” your transformer whistle button about half way. This “flicking” action causes the transformer to release a short DC signal that ProtoSounds® reads as an indicator to activate the brake sounds. The Galloping Goose™ won’t slow down even though the sounds play. This simulates the wheel flange squeal of a train travelling through a turn too quickly.

Note: Consistent activation of the wheel flange squeaking is determined by the condition of your transformer’s whistle button rectifier disc. Older rectifier discs may not release a clear and strong enough DC signal required by ProtoSounds® computer to play the wheel flange squeaking.

SELF-RECHARGING BATTERY BACKUP SYSTEM

ProtoSounds® state-of-the-art design includes a self-recharging battery backup system for improved performance at any speed. The self-recharging battery backup system is automatically turned on or off whenever track power is turned on or off. There are no switches to turn on or off to enjoy the benefits of the automatic battery backup system. The battery ensures that power to the sound system will remain on during directional changes, setting RESET options, or when traveling over dirty track and switches.

The battery is a rechargeable NiCad type which is continually charged from the track when power is applied. NiCad batteries are a dry battery and should not leak or cause any damage to your locomotive and will last up to five years or longer. If you notice that the sounds seem distorted or garbled at low voltages or become silent when power from the transformer is shut off, the battery charge may be low. Before replacing the battery, you should put the engine in NEUTRAL and leave the transformer throttle at about 12 volts for fifteen minutes. This should temporarily recharge the battery. If the garbled or distorted sounds are reduced, then your battery charge has worn down. You can give your battery a full charge by leaving the engine ON in NEUTRAL for 6 hours.

REPLACING THE PROTOSOUND BATTERY

The ProtoSound® battery is a special NiCad 7-cell, 8.4v battery - NOT the 6-cell, 7.2v battery found in most convenience stores. The 6-cell NiCad is NOT recommended for use with ProtoSound® applications. Replacement ProtoSound® batteries are available from MTH ProtoSound Electronics at 7020 Columbia Gateway Drive, Columbia, MD 21046. A standard 9v alkaline battery can be substituted as a temporary fix, but since alkaline batteries can't take a charge, it will eventually wear down. Regardless, it should give you a week to a couple of months use while you wait for your replacement ProtoSound® battery to arrive.


SPECIAL ANNOUNCEMENTS (SAS)

ProtoSounds® is now equipped with operator controlled Galloping Goose™ announcement sounds, hereby known as SAS. This easy to use feature plays digitally reproduced Galloping Goose™ announcements and street action sounds whenever you activate and stop your Galloping Goose™. No additional wires or modifications are needed on your layout to enjoy these amazing sound effects, though an option does exist that allows you to completely automate your Galloping Goose™ and activating the sounds at user specified locations.

ACTIVATING SPECIAL SOUNDS

Your ProtoSounds® equipped engine features an operator controlled announcement sound set that can be activated in one of three ways, in automatic mode, manual mode or in layout controlled mode. Once activated, this easy to use feature plays digitally reproduced sounds of a trolley stop.

Option 1 - Automatic Mode: If you are using a separate bell button controller to ring your bell (like the Lionel Railsounds No. 5906 bell activation button) you can activate the feature by entering forward or reverse and pressing and holding the bell button for one second at which time the operator will hear the driver announce the next Galloping Goose™ stop or location. Continued holding of the bell button will be followed by a special “Air Release” sound which indicates. At this point the operator should release the bell button if he wishes to stop the Galloping Goose™. If the operator continues to hold the bell button down, the Galloping Goose™ will continue traveling down the track until the operator chooses to release the bell button. This option gives the operator the true sense of acting as the Galloping Goose™ driver and responding to the passenger’s desire to leave the Galloping Goose™. It also allows the operator to announce the next stop well before coming to the desired Galloping Goose™ stop

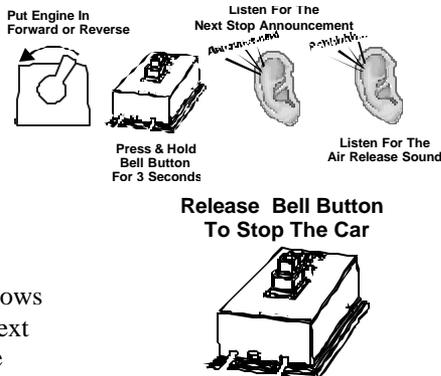


and precisely control where the Galloping Goose™ does finally stop. This option is the default setting for the SAS feature.

Once the bell button is released, the Galloping Goose™ will come to an automatic stop even though power to the track has not been interrupted by the operator. Once stopped, the SAS feature will play the sound of the doors opening followed by the sounds of the Colorado wilderness with the sound of a white water river in the distance. During this event, the operator can expect to hear a variety of different sounds, including thunder, cows, sheep, birds and four horn blasts indicating the Galloping Goose™ is getting ready to leave. After a set period of time, the operator can expect to hear the “Please close the door!”, followed by the car door closing. Then two horn blasts for forward or three for reverse followed by the bell ringing. Immediately following the door closing, the motor will be engaged and the Galloping Goose™ will automatically take off. The Bell will shut off by itself after 5 seconds. The SAS feature will automatically start the Galloping Goose™ back up in the same direction it was travelling when the SAS feature was activated. So if the Galloping Goose™ was travelling forward before SAS was activated, it will continue travelling forward once SAS has completed.

Option 2 Manual Mode

The SAS feature is armed in the same manner as Option 1, except that the Galloping Goose will not automatically stop when the bell button is released. To activate the rest of the SAS feature, the operator must stop the car and place it in the neutral position by interrupting the transformer throttle. The Galloping Goose will not automatically start up again after the initial SAS sounds have played. Instead, the sounds will continue, giving the operator the ability to leave the car at the stop for longer periods of time. When the operator is ready to leave the stop, the transformer throttle must be interrupted again. This will be followed by the sound of the doors closing, after which the SAS will automatically reengage the motor and the Galloping Goose will proceed away from the stop. Like Option 1, the Galloping Goose will continue in the same direction that it was traveling before SAS was activated.

Option 3 - Automatic Layout Configuration The SAS feature in the Galloping Goose™ can be automatically triggered on a layout by configuring insulated pieces of track near the designated Galloping Goose™ stops around the layout. The insulated track sections (center rail only) need to be attached to the transformer with a diode in the line to create a negative DC signal (the same signal created by the bell button) and be long enough that the signal will be outputted for at least 3 seconds (the time it takes to activate SAS by pressing the bell button). In short, the insulated track section and diode are acting like a bell button. Whenever the Galloping Goose™ runs through the insulated section, it will receive the negative DC signal and SAS will be activated. Because the diode reduces the power to the track, the car will also slow as it enters the insulated track section. The key to making this option effective is using a section long enough to create the 3 second “push” of negative DC without slowing the Galloping Goose™ to a complete halt. It is recommended that the operator attempt to have the rear roller of the Galloping Goose™ leave the insulated track section shortly after the 3 second push of negative DC has been received by the ProtoSound® module inside the Galloping Goose™. This way, when SAS has completed its sequence, the Galloping Goose™ will be sitting on a track section with enough power to sufficiently get the Galloping Goose™ moving again. Adjusting the overall track voltage will help adjust the speed necessary to carry the Galloping Goose™ through the insulated track section but caution should be taken that not too much power is on the track or the Galloping Goose™ may pass through the insulated section before 3 seconds of negative DC was received by the ProtoSound® module. This will be obviously the case if the Galloping Goose™’s bell turns on instead of it stopping.

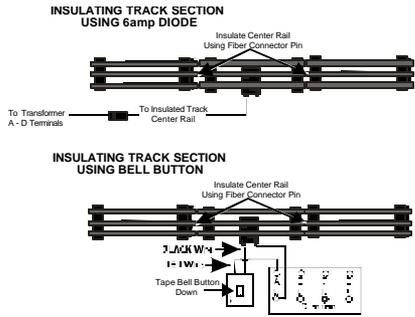

TIPS ON USING THE SAS FEATURES

SAS is a unique feature of ProtoSounds® that can be completely controlled by the operator or automatically configured on the layout. You decide how, when or if you want to utilize the feature. By reviewing the following tips you should find solutions or suggestions to the various operating scenarios you might encounter when using SAS.

Tip #1: You can escape the SAS sequence by turning the transformer throttle to OFF after SAS has been activated and waiting 3 seconds before turning the throttle back ON. This will return the Galloping Goose™ to the RESET position.

Tip #2: You do not have to be in the forward state to utilize SAS. For example if you activate the SAS feature while in reverse and interrupt the throttle to enter neutral, you will be entering neutral before forward rather than neutral before reverse as normally defined by the ProtoSound® sequencing. SAS, however, remembers what direction state the Galloping Goose™ was in before activation and will return the Galloping Goose™ to that same state upon completion of the SAS sequence, skipping the next direction state normally found in the ProtoSound® sequence. This will allow your Galloping Goose™ to leave the stop in the same reverse direction that it arrived in.

Tip #3: In Auto Mode, putting the Galloping Goose™ into Neutral immediately after the Galloping Goose™ stops (when SAS has been activated) will cause SAS to play 3 dings of the bell, play the door closing sound and repower the Galloping Goose™ into the forward mode.

Tip #4: In Auto Mode, putting the Galloping Goose™ into Neutral after the Galloping Goose™ stops (when SAS has been activated) and the sound of the Galloping Goose™ doors opening has played will cause SAS to play two dings of the bell, play the door closing sound and then proceed into the forward mode.

Tip #5: In the Track Configured Mode, interrupting the power while the Goose is travelling through the insulated track section will cause SAS to sound 3 dings of the bell, close the doors and proceed off in the reverse direction.

PROTOSOUND® VOLUME ADJUSTMENT

Your ProtoSound® system has two types of volume adjustment. A manual turn knob on the bottom of the chassis (See Fig. 1, on Page 3) allows you to control all the sounds in the system and a remote control “RESET” option (Option # 6), allows you to control the volume level of the Galloping Goose™ motor sounds remotely from the transformer. Turning the volume adjustment knob clockwise will increase the volume and counterclockwise will lower the volume of all sounds; bell, horn, engine sounds, SAS, etc.

USING “RESET” TO PROGRAM PROTOSOUNDS®


As mentioned earlier, there are several programmable options in each ProtoSound® equipped engine that can be remotely set from any compatible standard AC transformer equipped with a whistle button. For a list of compatible transformers, see the chart on page 28. This hands-off approach gives you unprecedented control of your railroad empire’s motive power never before seen in model railroading. Each programmable feature can be accessed whenever your Galloping Goose™ is in the RESET state as described earlier on page 4. By following the instructions below you will find the programming easy and straight forward.

ENTERING RESET OPTIONS

ProtoSound® is equipped with a few programmable features that are accessed in the RESET state by moving the transformer throttle up and down between full voltage and low voltage (6 to 8 volts) without shutting the transformer off

completely. Each time this is done you advance, one feature at a time, through the available options. An air-release sound is heard


each time the throttle is advanced and returned. In addition, there are special sounds to tell you what RESET position you are in.

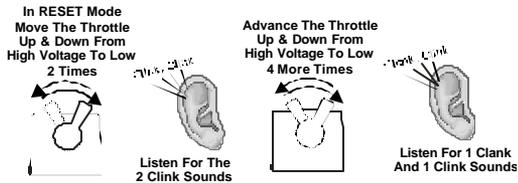

For example, if you want to select Feature 2, you put the Galloping Goose™ in RESET, and move the throttle up and down from full throttle to low two times. After the second advance, you will hear two “clinks” indicating that the computer is now in Feature 2. Advance the throttle again and you will hear three “clinks” for Feature 3. Advance it two more times and you will hear a “clank” indicating that you are now in Feature 5. Advance the throttle two more times and you will hear a “clank” and two “clinks” indicating Feature 7. ((5 throttle advancements = 1 clank) + (2 throttle advancements = 2 clinks)). “Clank + “Clank” + “Clank” = Feature 7. You can advance the throttle as quickly as you like (though you may not hear the air-release sounds) and the computer will still remember the number of times the throttle is advanced by playing back the number of “Clinks” and “Clanks” to confirm the feature you’ve selected.

SETTING THE ENGINE VOLUME

Of all the sounds that come with each ProtoSound-equipped locomotive, the one most often turned down is that of the engine volume because it is the one sound normally heard whenever the engine is running and is what usually can become tiresome to the ear over prolonged running sessions. The volume adjustment is controlled through RESET Feature 6.

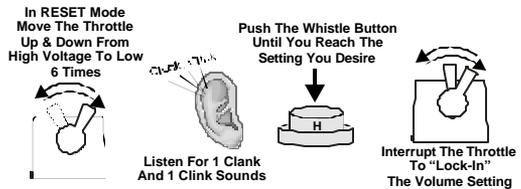

To access the feature, advance the transformer throttle to put the engine in RESET. Move the throttle up and down, as described on page 13, 6 times. After you hear the “clank” and “clink” indicating that you are in Feature 6, press the whistle button to select the engine volume you desire. Pushing the whistle button once will give you full volume, which is the factory setting. Pushing the whistle button a second time will give you 50% volume, pushing it a third time will give you 25% volume and pushing it a fourth time will give you no sound. The microprocessor will immediately play the sound level each time the whistle button is pushed so that you can decide if it is acceptable. You can recycle through the four choices by simply continuing to push the whistle button.

Once you have decided on the appropriate volume level, turn the transformer throttle off and on again or press the transformer direction switch to lock in your selection. The volume adjustment will remain set at

the level you have chosen until you change it again. Regardless of the engine volume setting, the horn, bell, compressor and SAS sounds will function normally. In fact because only the engine volume is affected by selections in Feature 6, when you select 0 volume, you can still hear the horn, bell and SAS sounds when the Galloping Goose™ is running or in neutral.

PROGRAMMING FOR A SEPARATE BELL BUTTON CONTROLLER

To operate ProtoSounds® with a separate bell button controller, like the Lionel® No. 5906 bell button, you will need to wire up the controller to your transformer and track as shown in Fig. 2. Once the button is wired, ProtoSounds® comes preprogrammed to allow you to operate the bell by simply pushing the bell button as described on page 5. To turn the bell off, push the button again.




Figure 2: Wiring Up A Bell Button

PROGRAMMING FOR SQUEAKING BRAKE OPERATION

ProtoSounds® can be programmed for squeaking brake operation in three different manners; (1) Squeaking brakes can be activated by bell button control, (2) they can be programmed for

continuous operation subject to throttle changes or (3) they can be programmed to be turned off. The default setting is

(2) Squeaking brakes are activated for full-time operation as described on

page 6. To change the default setting, enter RESET and go to Feature 45.

(See the section *Using RESET To Program ProtoSounds® on page 13*).

Once in Feature 45, press the whistle button and wait for the module to sound a bell ding(s). Continue pressing the whistle button until the module plays back one ding for option 1 - Squeaking brakes are activated by the bell button with SAS operation. Press the whistle button again until the module plays back two dings for option 2 - squeaking brakes are activated for full-time operation, or press the whistle button again until the module plays back three dings for option 3 - Squeaking brakes off. Once you have decided on the desired setting, simply turn the throttle off and then on again to "Lock-In" the new setting. To reset the computer to its original factory default setting (option 2 - squeaking brakes are activated for full-time operation), repeat the above procedure but keep pushing the whistle button until the module only responds with two bell dings.




PROGRAMMING FOR HORN IN NEUTRAL OPERATION

If you are operating your Galloping Goose™ with a separate bell button and want to blow your horn when your Galloping Goose™ is in neutral, you will need to

program ProtoSounds® to do so as the factory setting only

allows the horn to blow in forward or reverse. To do this, enter RESET and go to Feature 25. (See the section *Using RESET To Program*

ProtoSounds® on page 13.) Once in Feature 25, press the transformer

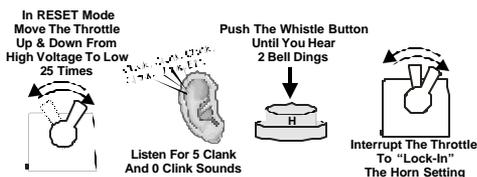

whistle button and wait for ProtoSounds® to sound a bell ding(s). Continue pressing the whistle button until ProtoSounds® sounds two bell dings (signifying that ProtoSounds® has been programmed to sound the horn in neutral). Turn the throttle off and then on again to “Lock-In” your selection. Now, whenever you are in neutral, you can blow the horn with the transformer whistle button. To reset ProtoSounds® to its original factory setting of no horn in neutral, repeat the above procedure but keep pressing the whistle button in Feature 25 until ProtoSounds® only dings once instead of twice.


Note: When “Horn In Neutral” is set, the bell will only operate with a separate bell button and the horn will not sound in neutral if the transformer throttle setting is over 11 volts.

PROGRAMMING FOR SAS OPERATION

ProtoSounds® is equipped with a RESET setting to automatically select the Galloping Goose™ Announcement Proto-Effects Options (SAS) features. You also may want to configure SAS for manual operation or turn it off completely. To configure SAS, enter RESET and go to Feature 28. (See the section on **Using RESET To Program ProtoSounds®** on page 13). Once in Feature 28, press the transformer whistle button and wait for

ProtoSounds® to sound a bell ding(s). Continue pressing the whistle button on and off until ProtoSounds® sounds one bell ding(s) (signifying that the SAS feature has been turned off). Simply turn the transformer throttle OFF and then ON again to lock

in the new setting. To reset ProtoSounds® to its original factory setting of Squeaking Brakes and SAS on, repeat the above procedure but keep pressing the whistle button in Feature 28 until ProtoSounds® dings 3 times instead of once. Interrupt the throttle by turning it OFF and then ON again to lock in the new setting. If you prefer SAS Option 3 - Manual Mode, repeat the above procedure but keep pressing the whistle button until you hear 2 bell dings instead of 3.

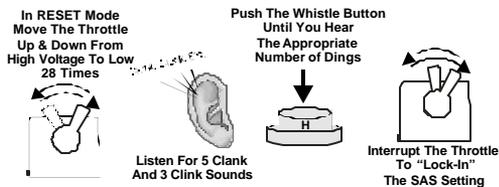


ACTIVATING REMOTE LOCK-OUT CONTROL

ProtoSound® equipped engines feature a RESET setting that allows the operator to remotely “lock” the engine into forward, neutral or reverse. This is especially useful on layouts that feature “blocked” track sections. The lockout feature comes from the factory in the OFF position, meaning it is not active when you first take the engine out of the box. This is done to prevent novice operators from accidentally locking their engine into forward, neutral or reverse

and then mistakenly thinking that the engine’s electronics have failed. To activate the Remote Lockout Control setting, go to RESET Feature 40 (See the section entitled


Using RESET To

Program ProtoSounds® on page 13). Once in Feature 40, press the transformer whistle button and wait for ProtoSounds® to sound a bell ding. Continue pressing the whistle button until ProtoSounds® sounds two bell dings signifying that the Remote Lockout Control has been selected. To lock in the setting, simply turn the throttle all the way off and then back on again. To turn the Remote Lockout Control setting back off, go back to Feature 40 and press the whistle button until only one bell ding sounds. To lock in the setting, simply turn the transformer throttle off and then back on again. Alternatively, you can go to RESET Feature 18 to reset all ProtoSound® features back to their original factory defaults including Remote Lockout Control.

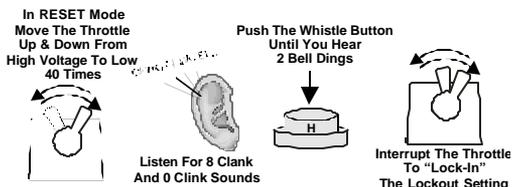

RESETTING ALL PROTO SOUND® OPTIONS TO FACTORY DEFAULTS

ProtoSounds® is equipped with a RESET feature (Feature 18) that resets all programmable options back to their original factory settings. This is a useful feature if you find your engine not operating the way you think it should and don't want to take the time to check each RESET feature one at a

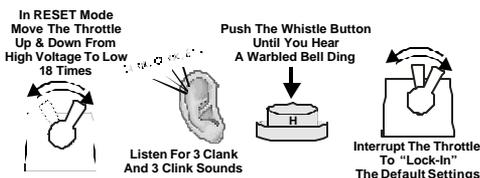

time. To reset all the RESET features back to their original factory settings, enter RESET and go to Feature 18. (See the section entitled *Using RESET To Program ProtoSounds®* on page 13). Once in Feature 18, press the transformer whistle button and wait for ProtoSounds® to sound a garbled bell sound. Interrupt the throttle again to lock in the setting.

REVERSE UNIT LOCK-OUT OPERATION

ProtoSounds® unique design eliminates the need for a lock-out switch on the locomotive by allowing the customer to lock the engine into any directional state (forward, neutral or reverse) from the transformer. This will allow users to run the Galloping Goose™ on layouts equipped with block signals or stop stations which would normally cycle the engine back into neutral. The feature must be first turned on by accessing RESET Feature 40 (See section entitled *Using RESET To Program ProtoSounds®* on page 13).

LOCKING THE GALLOPING GOOSE™ INTO FORWARD OR REVERSE

To lock the Galloping Goose™ into Forward or Reverse, use the transformer throttle to enter Forward or Reverse (whichever state you want to lock the engine into) and while the Galloping Goose™ is moving press and hold the whistle button. WHILE THE HORN IS BLOWING TURN THE THROTTLE OFF AND THEN LET GO OF THE WHISTLE BUTTON. After about two seconds, you will hear a short horn blast. QUICKLY TURN THE THROTTLE BACK ON AGAIN. Your Galloping Goose™ is now locked into Forward or Reverse and it will remain so until you unlock the engine, even if you wait a year to run your engine again.

UNLOCKING THE GALLOPING GOOSE™

Unlocking the engine is a similar procedure. WHILE THE ENGINE IS MOVING, PRESS AND HOLD THE WHISTLE BUTTON. WHILE THE HORN IS BLOWING, TURN THE THROTTLE OFF AND THEN LET GO OF THE WHISTLE BUTTON. After three seconds without power you will hear one chime of the RESET bell. TURN ON THE POWER AGAIN. Your engine is now in RESET and will operate normally once you interrupt power and enter the forward direction.

LOCKING THE GALLOPING GOOSE™ INTO NEUTRAL

To lock the Galloping Goose™ into the NEUTRAL position, PUT THE GALLOPING GOOSE™ IN NEUTRAL AND WITH THE THROTTLE STILL ON, PRESS AND HOLD THE WHISTLE BUTTON. WHILE THE WHISTLE BUTTON IS BEING PRESSED, TURN OFF THE THROTTLE AND LET GO OF THE WHISTLE BUTTON. After about two seconds, you will hear a short blast of the horn. QUICKLY TURN THE POWER BACK ON AGAIN. Your Galloping Goose™ is now locked into NEUTRAL.

NOTE: When locking the Galloping Goose™ in the Forward or Reverse positions, the whistle button will blow the horn. But when locking the engine into the NEUTRAL position, the whistle button may turn on or off sounds of the bell, coupler arming or coupler firing depending on the transformer throttle voltage settings prior to the user's attempt to lock out the engine. Remember, the horn doesn't blow in NEUTRAL (unless you programmed it to do so using Feature 25. See page 17 for details), only the bell rings or the coupler operates in NEUTRAL. While it doesn't make any difference on how the lockout function operates, you may hear one of the three different NEUTRAL-activated sounds.

To unlock the Galloping Goose™ from the NEUTRAL position, follow the process to unlock the engine in the Forward or Reverse directions above.

NOTE: When the Galloping Goose™ is locked out in forward or reverse, SAS operation is disabled.

MANUAL REVERSE UNIT LOCKOUT (Non-ProtoSound® Equipped Engines)

A Galloping Goose™ not equipped with ProtoSound® can be manually locked into Forward, Neutral, or Reverse by sliding the lockout switch to the OFF position after entering the desired reverse unit state (See Figure 1 on page 3). To operate the engine again in automatic mode, simply slide the switch back to the ON position.

Note: Once the unit is locked out and an hour or more of non-use has passed, the reverse unit may cycle into any of the three directional states. Should this occur, the ON/OFF switch should be reset to the ON position to regain normal operation.

OIL & LUBRICATION INSTRUCTIONS

In order for the Galloping Goose™ to perform correctly and quietly, it is important that the chassis be lubricated before operation. Lubrication should include all truck block bushings and pickup rollers to prevent them

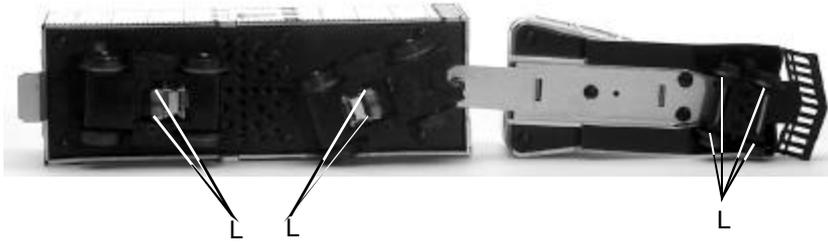


Figure 3: Lubricating The Locomotive Chassis

from squeaking. Use light household oil and follow the lubrication points marked “L” in Fig. 3 above.

The locomotive’s internal gearing in the power trucks has been greased at the factory and shouldn’t need additional grease until after 50 hours of operation or one year whichever comes first. Grease cannot be added to the internal gearing until the body is removed from the chassis which is held in place by six Phillips screws. The screws are located on each end of the chassis’ as seen in Fig. 5 on page 23. After removing the screws, lift the body away from the chassis and lay the body next to the chassis.

Next, remove the power truck block from the chassis by unscrewing the large Phillips motor mount screw on the bottom of the power truck (See Fig. 5). Once the motor mount screw has been removed, pull the motor away

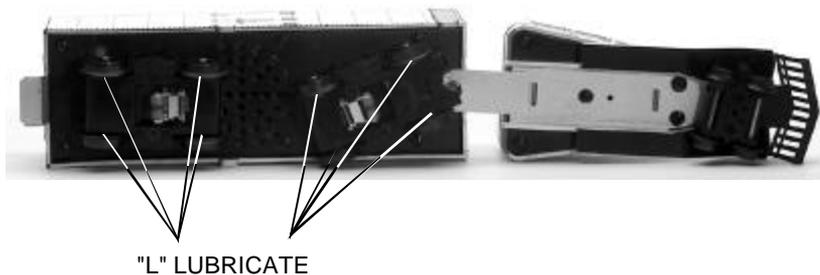


Figure 4: Lubricate The Truck Bushings

from the truck block and lightly coat the motor worm gear and bronze drive gear (in the truck block) with grease. Reassemble the truck and motor, being careful not to pinch the pickup and ground wires between the truck block and motor mount. When reassembling the chassis and body, be very careful that the lighting wire harnesses are not caught between the body and chassis as this can lead to a short which may damage the electronic circuit boards.

Periodically, check the Galloping Goose™ wheels and pickups for dirt buildup as this can significantly affect the engine's ability to perform properly. Dirty track and dirty wheels can cause both poor electrical contact as well as poor traction, especially on elevated track sections. Finally, dirt and oil build up can prematurely wear out the neoprene traction tires.

TRACTION TIRE REPLACEMENT INSTRUCTIONS

Your Galloping Goose™ is equipped with two neoprene rubber traction tires on the power truck. While these tires are extremely durable and long-lasting there may arise a time where they will need to be replaced. Should this occur, you will not need to remove the power truck from the chassis in order to slip the new tire over the grooved drive wheel.

Before the new tire can be installed, you must make sure the old tire has been completely removed from the groove in the drive wheel. Use a razor blade or small flatblade screwdriver pry away any remains left from the old tire that may still be in the drive wheel groove. Once the old tire has been completely removed, slip the new tire onto the wheel. You may find it useful to use two small flatblade screwdrivers to assist you in stretching the tire over the wheel. Be careful to avoid twisting the tire when stretching it over the wheel. If a twist occurs, the tire will have to be removed and reinstalled or a noticeable wobble in your engine will occur when operating the locomotive. In addition, it is important to make sure that the tire is fully seated inside the groove. Any portion of the tire extending out of the groove can cause the engine to wobble. A razor blade can be used to trim away any excess tire that doesn't seat itself inside the groove properly.

Replacement tires are available directly from MTH Electric Trains.

Light Bulb Replacement

The Galloping Goose contains two 1.5 volt headlight bulbs and one 6 volt interior light bulb. To replace the light bulbs, first remove the car body by removing the four screws that attach the car body from underneath the carbody frame. Then lift the car body from the frame. Next from underneath the car body frame remove the screw in the center that anchors the interior.

The bulbs are plugged into a connector at the rear of the car body frame. Unplug the connector for the bulb(s) that need to be replaced then remove the bulb from its location.

Headlight

The wires for the headlight bulbs are fed under the interior, down through the carbody frame and one each up under the fenders and into the headlight shells. The bulbs are removed from the headlight shells by pulling from the rear of the shells and back through the frame. Install the new bulbs in the reverse order. Then plug the connector into the correct socket.

Interior Light

The interior light is held into place by a rubber grommet in the interior module. Remove the burned out bulb from the back side of the grommet and insert the replacement bulb. Then plug the connector into the correct socket.

Replace the interior and mounting screw. Replace the car body and mounting screws.

Replacement bulbs are available directly from M.T.H. Electric Trains

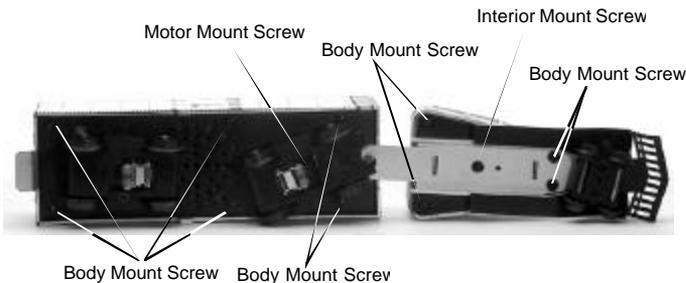


Figure 5: Removing The Body From The Chassis

TROUBLE SHOOTING *PROTOSOUND*® PROBLEMS

Although ProtoSound® has been designed and engineered for ease of use, some questions may arise during initial operation. The following table should answer most questions. If you find that your problem can't be resolved with this manual, contact MTH ProtoSound® Electronics (7020 Columbia Gateway Drive, Columbia, MD 21046, 410-381-2580) for additional assistance.

HORN PROBLEMS	REMEDY
The horn seems distorted at low voltages.	Your battery may be undercharged or dead. Try recharging the battery as explained in the battery sections.
When I press the whistle button, the bell comes on instead.	You are trying to operate the horn in neutral. The horn will only operate in Forward or Reverse unless you program ProtoSounds through Feature 25. See the instructions in the section entitled "Using RESET to Program ProtoSounds". The transformer leads may be wired to the track backwards. Reverse the lead connections to the transformer.
I can't get the horn to blow when I press the whistle button.	You may be pressing the whistle button too quickly. Most older AC transformers contain a two-step whistle button that releases a DC signal onto the track. It is this DC signal that tells the horn to blow. However, because the signal is weaker when the whistle button is depressed fully, the ProtoSound circuit may not recognize the signal. Try pressing the whistle button slower, taking approximately 1 second to fully depress the button.
BELL PROBLEMS	REMEDY
When I press the whistle button to activate the bell, the horn sounds.	You are trying to ring the bell in Forward or Reverse. The bell only operates in Neutral unless you have programmed ProtoSounds to recognize a separate bell button.
When I press the whistle button to activate the bell, I arm the coupler.	Reduce the voltage on the transformer before pressing the whistle button to activate the bell. The bell will only come on at 8 volts or less.
When I press the whistle button to activate the bell, the bell only rings once.	You are trying to ring the bell in RESET instead of neutral. Interrupt the power twice to enter Neutral, set the voltage at 8 volts or less and press the whistle button to activate the bell.
I can't get the bell to ring when I press the whistle button.	You may be pressing the whistle button too quickly. See the 3rd remedy in the horn section above.
The bell won't work with a separate bell button.	ProtoSounds must be programmed in order for a separate bell button to function. Enter RESET function number 20 (see the section entitled "Using RESET to Program ProtoSounds") and press the whistle button until the bell sounds two dings. Simply turn the throttle off and then on again to lock in the new setting.

LOCKOUT PROBLEMS	REMEDY
I can't get the engine to run after I power up the transformer. It sits still with the lights on.	The engine is locked out into the Neutral position. Follow the unlocking procedures in the Lockout Section.
The engine won't lock out into Forward, Neutral or Reverse even after the short horn blast sounds.	You are waiting too long to turn the throttle back on after the short horn blast sounds. The power must be turned back on immediately after the short horn blast sounds or the engine will go back into RESET. See the lockout procedure in the Lockout Section.
VOLUME PROBLEMS	REMEDY
When I try to run the engine, the motor volume is OFF or very low.	The motor volume has been programmed at a reduced volume or to be silent. Go to RESET Feature 6 and adjust the volume. See the section entitled "Using RESET to Program ProtoSounds" for more information.
When I try to set the motor volume, it resets itself to the original volume after I selected the new volume.	You are trying to set the volume with a poorly charged or dead backup battery. See the section on Battery Backup for more information.
When I try to set the Motor Volume to O Volume, I still hear the SAS sounds.	When the motor volume is set to O, you will hear the SAS sounds because setting the motor volume only controls the sound of the car itself. All other sounds, including SAS, the horn and bell will continue to play at the volume level set by the manual volume control knob located on the bottom of the chassis. See the section entitled "ProtoSound Volume Adjustment" for more information.
The sounds seem distorted, especially when the whistle or bell is activated.	The overall ProtoSound volume has been set to high creating the distorted sounds. Try turning the volume control knob located on the bottom of the chassis counter clockwise to reduce the overall volume level.
BATTERY PROBLEMS	REMEDY
I get no sounds when the engine shifts between the direction states.	The battery may be dead or needs charging. See the Battery Backup section for more information.
After I turn off my transformer, my engine continues to make sounds before quitting with a ding of its bell.	ProtoSounds continues to sound for approximately 10 seconds after power to the track has been shut off.
The sounds distort at low voltages.	The battery is insufficiently charged or dead. Follow the recharging instructions found in the section entitled "Self Recharging Battery Backup System".
A repeating horn blast occurs after the power has been shut down.	ProtoSounds includes a built-in analysis test that checks for correct functioning. If a repeating horn blast is heard when power is OFF, your car should be returned to the factory for service.

RESET PROBLEMS	REMEDY
<p>When I first turn the power on, the engine will not begin to run. I have to turn the throttle off and then on again to get the engine to operate.</p>	<p>This is normal behavior. When power to the track is first turned on, ProtoSounds enters a "RESET" phase at which time the engine undergoes a system check. Power must be interrupted to get the engine into the Forward Phase. See the section entitled "DCRU Reverse Unit Operation" for more information.</p>
<p>Whenever I interrupt the power from RESET to enter Forward, the engine goes back into RESET instead of Forward. I know this occurs because the bell dings twice.</p>	<p>Whenever ProtoSounds enters RESET after power has been off for more than 15 seconds, the microprocessor initiates a system check to determine that everything is in working order. This system check requires 2.2 seconds to complete. We recommend that you don't interrupt the power in RESET until the 2.2 seconds have elapsed. This will guarantee that the system check will have been completed since the startup sounds take longer than 2.2 seconds to play. If the problem persists, we recommend that you operate the throttle with a slower movement as you interrupt the power in RESET and enter the Forward Phase</p>
BRAKE SOUND PROBLEMS	REMEDY
<p>When the transformer is throttled down, the sounds won't play.</p>	<p>The brake features has not been activated. See the section on activating the brake feature for more information. The throttle voltage setting on the transformer is either not starting high enough or ending low enough to trigger the brakes sounds. Try increasing the throttle setting to 14 volts or higher before throttling down to 8 volts or less.</p>
<p>The brake sounds continue to play even after the engine stops.</p>	<p>The brake feature sound record lasts for three seconds. With practice you can control how quickly you should stop the engine to keep it in sequence with the sound of the brake's squeaking.</p>
<p>The brake feature was activated in neutral after the engine was running in forward, but the brake sounds would not play when triggered after the engine went back into forward or reverse.</p>	<p>The brake feature will only remain enabled if it is triggered in the first direction state you enter after activating the feature in neutral. You cannot interrupt the power twice to enter another direction state and still have the brake feature active. Therefore, in order to make the brake sound feature operate in forward, you must first activate the feature in the neutral position that occurs after the engine was in the reverse state.</p>

SAS PROBLEMS	REMEDY
The SAS feature does not begin even after stopping the engine and hearing the brake sounds.	The power was disconnected once the car entered the neutral state thus disabling SAS. The transformer throttle was interrupted after the car stopped, ending the SAS sequence. Don't touch the throttle once the SAS sequence begins.
The SAS sound effects occasionally repeat themselves.	ProtoSounds has a built-in random number generator that randomly selects each sound clip to play. Because there are only a total of 8 sound clips available in each SAS event, it is probable that a sound can occasionally be repeated one or more times.
Once in SAS, the engine never goes in reverse.	So that the trolley announcement sound effects and operation is as realistic as possible, ProtoSounds disables the reverse unit state whenever SAS is enabled. This way the engine never goes into reverse as the operator cycles into and through the SAS events.
When the engine enters the SAS events, the bell automatically comes on.	SAS has a built-in command to turn on the bell when the system enters and leaves SAS. When leaving SAS the bell will ring 2 times before turning off.
Whenever SAS is enabled, pressing the whistle and bell buttons has no affect.	Because SAS must control various effects in the SAS events, the bell and whistle functions are disabled until either the SAS events have been completed, or the engine is shut down for 3 or more seconds.
I can't get SAS to begin when the engine is stopped in the neutral position.	It is possible that SAS was never enabled or has been disabled. Try reactivating the feature by holding down the bell button for three or more seconds in forward or reverse.
The engine will not enter the SAS sequence when running through the insulated track section on the layout.	There are two possibilities as to why an insulated track section won't activate the SAS feature. 1. The diode(s) do not put off a strong enough negative DC signal to activate SAS. In this case, try using different diodes. 2. You are using a transformer other than the MTH Z-4000, Lionel ZW or a Dallee Hosteler. These particular transformers are the only transformers currently on the market known to operate SAS via an insulated track section.

TRANSFORMER WIRING CHART

ProtoSounds® is designed to work with any standard AC transformer that uses a "Pure Sine-Wave" format. The chart below lists the many Lionel® compatible transformers, such as the Lionel KW or ZW models. In addition, the chart details how the terminals on these compatible transformers should be attached to your layout. The Trainmaster system from Lionel® (marked with an asterisk below) will not function correctly

Transformer Model	Center Rail	Outside Rail	Mn/Max. Voltage	Power Rating	Transformer Type
Lionel 1032	U	A	5-16v*	90-Watt	Standard
Lionel 1032M	U	A	5-16v*	90-Watt	Standard
Lionel 1033	U	A	5-16v*	90-Watt	Standard
Lionel 1043	U	A	5-16v*	90-Watt	Standard
Lionel 1043M	U	A	5-16v*	90-Watt	Standard
Lionel 1044	U	A	5-16v*	90-Watt	Standard
Lionel 1053	U	A	8-17v	60-Watt	Standard
Lionel 1063	U	A	8-17v	60-Watt	Standard
All-Trol	Left Terminal	Right Terminal	0-24v	300-Watt	Electronic
Cab-1/Powermaster	A	U	0-18v	135V.A.	Electronic
Dallee Hostler	Left Terminal	Right Terminal			
Lionel LW	A	U	8-18v	75-Watt	Standard
Lionel KW	A or B	U	6-20v	190-Watt	Standard
MRC Tech II	Left Terminal	2 nd From Left	0-15v*	40V.A.	Electronic
Lionel MW (not recommended)	Outside Track Terminal	Inside Track Terminal	5-16v*	50V.A.	Electronic
R.O.W.	Red Terminal	Black Terminal	0-24v	384-Watt	Standard
Lionel RS-1	Red Terminal	Black Terminal	0-18v	50V.A.	Electronic
Lionel RW	U	A	9-19v	110-Watt	Standard
Lionel SW	U	A	Unknown	130-Watt	Standard
Lionel TW	U	A	8-18v	175-Watt	Standard
Lionel ZW	A or D	U	8-20v	275-Watt	Standard
MTH Z4000	Red	Black	5-21v	390-Watt	Standard

with ProtoSounds® without disrupting the sound effects. Therefore, whenever ProtoSounds® senses that the Trainmaster system is being used, it automatically disables ProtoSounds® sound effects. The operator retains control over the engine, but no sound effects will play.

**ProtoSounds needs over 14 volts of power to work properly. Overloading or using in-line accessories with this transformer may lower the peak voltage below ProtoSound's requirements.*

PROTOSOUND RESET FEATURE CHART

The following chart lists the available features found in your ProtoSound® equipped locomotive. The default settings for each feature as well as the operation sequence of the feature are listed in separate columns. You can reset all features to their original factory settings by accessing Feature 18 in RESET and press and hold the transformer whistle button until you hear a soft, warbled bell sound.

RESET #	OPERATION	DEFAULT	CLANKS/CLINKS
6	Engine Volume	Full Volume	1 Clank/1 Clinks
10	RESERVED		2 Clanks/0 Clinks
18	Reset Default Settings		3 Clanks/3 Clinks
20	Remote Bell Button	Bell Button Active	4 Clanks/0 Clinks
23	RESERVED		4 Clanks/3 Clinks
25	Horn In Neutral	Horn In Neutral OFF	5 Clanks/0 Clinks
27	RESERVED		5 Clanks/2 Clinks
28	Brake/SAS Enabled	Brake/SAS ON	5 Clanks/3 Clinks
40	Lockout Enabled	Lockout OFF	8 Clanks/0 Clinks
45	Squeaking Brakes	Brakes Always ON	9 Clanks/0 Clinks

SERVICE & WARRANTY INFORMATION

HOW TO GET SERVICE UNDER THE TERMS OF THE LIMITED ONE YEAR WARRANTY

For warranty repair, do not return your product to the place of purchase unless it was purchased from Mike's Train House in Columbia, MD. Instead, follow the instructions below to obtain warranty service as our dealer network is not prepared to service the product under the terms of this warranty.

1. First, write, call, email or FAX MTH Electric Trains, 7020 Columbia Gateway Drive, Columbia, MD 21046, 410-381-2580 (FAX No. 410-423-0009), or on the internet at service@mth-railking.com or our web site, www.mthtrains.com, stating which product you have, when it was purchased and what seems to be the problem. You will be given a return authorization number to assure that your merchandise will be properly handled upon its receipt at MTH.

2. CAUTION: Make sure the product is packed in its original factory packaging including its foam and plastic wrapping material so as to prevent damage to the merchandise. The shipment must be prepaid and we recommend that it be insured. *A cover letter, including your name, address, daytime phone number, a copy of your sales receipt, the Return Authorization number and a full description of the problem, must be included to facilitate the repairs. Please include the description regardless of whether or not you discussed the problem with one of our service technicians when contacting MTH for your Return Authorization number.*

3. Please make sure you have followed the instructions carefully before returning any merchandise for service.

LIMITED ONE YEAR WARRANTY

This item is warranted for one year from the date of purchase against defects in material or workmanship. We will repair or replace (at our option) the defective part without charge for parts or labor, if the item is returned to the address below within one year of the original date of purchase. This warranty does not cover items that have been abused or damaged by careless handling. Transportation costs incurred by the customer are not covered under this warranty.

This warranty gives you specific legal rights and you may have other rights which vary from state to state.

ProtoSounds® is a trademark of MTH Electric Trains. DCRU® is a registered copyright of QS Industries, Inc. Lionel® and Railsound® are registered trademarks of Lionel L.L.C.